## Servomotor Controlled Double Head Aluminium Cutting Machine




## **General Features**

- Precise cutting of Aluminium profiles between 20º-135º.
- Has lubrication system.
- Left feeding table and automatic saw safety cover.
- Profile support arm between two heads.
- Special vacuum system to cut without depositing sawdust on heads.
- Profile height measuring system.
- Automatic slicing system.

## **Optional Equipments**



- BY 100 Barcode Printer
- E 100 Barcode Printer (ethernet)
- BB 200 R Feeding TableF 100 E Feeding Table (Additional)D 100 Double Press
- KP 100 Cutting Program






- On auto mode, it goes to position without operator intervention.
- Option to work with CF Card.
- 1850 different cutting length memory capacity.



 Precise cutting at inner 45º, outer 20º thanks to patented control system.



- Hydropneumatical system provides precise cutting quality.
- Horizontal profile clamping and practical piston place adjustment system.

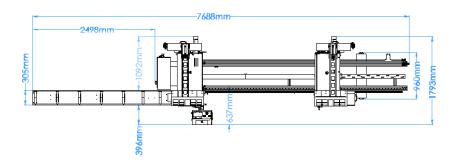



H: 1800 mm

• 400 V

L1-L2-L3-N-PE 50 / 60 Hz 5.8 kW

kg

1200 kg

6-8 Bar 25 l / Cycle

ØD: 550 mm

L min: 400 mm L max: 6400 mm

• The machine has patented features.

