





General Features

- Precise cutting of PVC profiles between 20° - 160° degrees.
- Precise angle adjustment with vertical bearing system.


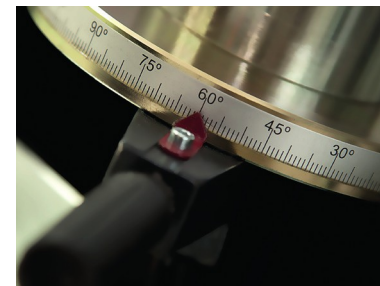


- Support pins to fix the angles at 45° and 90° degrees.

- Upward saw.
- Adjustable saw progress speed.
- Maximum safety with cover safety key.
- Long-lived saw and vibration free operation thanks to cast saw cover.

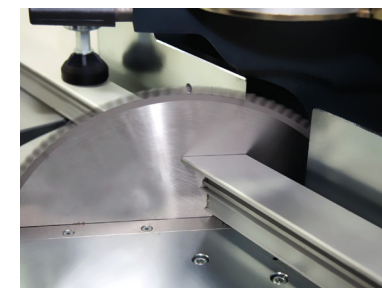

Cutting Diagram Ø400 (option Ø420)

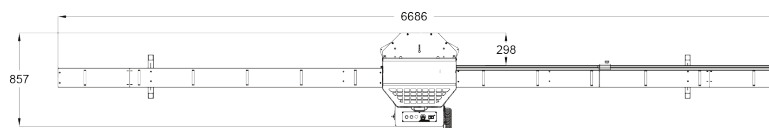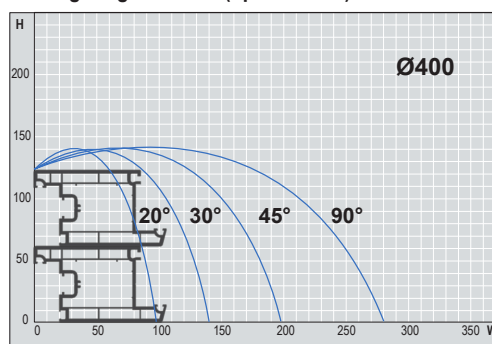

AA 1020 - AA 1025


H: 1285 mm W: 6700 mm L: 890 mm	400 V L1-L2-L3-N-PE 50 / 60 Hz 1,5 kW	285 kg	6-8 Bar 5 l / Cycle	Ød: 400 mm

Optional Equipments

OPCIE - Doplnkové vybavenie – OPCIÓK - Kiegészítő felszerelés



• DS 530 L/R
Digital Measuring
System 4014 mm



• MS 100 L/R
Man. Measuring
System 3220 mm



• DS 100 L/R
Man. Digital
Measuring
System 3220 mm



• DS 200 L/R
Rotating Arm
Digital Meas.
System 3140 mm